

# A40E

## Digital Day & Night Vision Scope



With an advanced 4K UHD detector and a 40 mm/F2.0 lens, the Digital Day & Night Vision Scope ALPEX 4K Lite A40E delivers an 18.7 m @ 100 m field of view, offering exceptional clarity for pest control and small game hunting, day or night. Enhance nighttime performance with an extra IR torch for even greater precision.

### Key Feature

- 3840 × 2160 resolution CMOS detector
- 40 mm lens with F2.0 aperture
- 1920 × 1080 resolution 0.49-inch OLED display (square & round optional)
- Supports Day/Night/Auto/Green/Yellow mode
- Supports recoil-activation recording with audio, built-in EMMC (32 GB)
- Up to 7.5 hours of continuous operation
- Replaceable and rechargeable external battery

# Specification


Main	
Max. Resolution	3840 × 2160
Frame Rate	50 Hz (4K), 100 Hz (1080P)
Lens (Focal Length)	40 mm, F2.0
Detection Range	Day: 800 m
Min. Focusing Distance	2 m
Magnification	3.5× to 20.5× (5.8×) Support continuous zooming and 0.5×, 1×, 2×, 3×, 4× optional step value
Field of View	10.7° × 6.1° / 18.7 m × 10.1 m @ 100 m
Image Display	
Display	1920 × 1080, 0.49 inch, OLED
Image Mode	Day, Night, Auto, Green, Yellow
Exit Pupil	6 mm
Eye Relief	45 mm
Diopter (Range)	-5 D to 5 D
System	
Record Video	On-board Video Recording
Record Video Resolution	1920 × 1080
Capture Snapshot	Yes
Audio Recording	Yes
Recoil-activation Recording	Yes
Standby Mode	Yes
Storage	Built-in EMMC (32 GB)
PIP	Yes
Freeze Zeroing	Yes
Zeroing Profiles	5
Max. Recoil	1000 g/0.4 ms
Hotspot	Yes
Ballistic Calculation	NA
Click Value	1 click = 1cm @ 100 m
Power Supply	
Battery Type	One Rechargeable Lithium Battery (Internal), One Replaceable and Rechargeable 18650 Battery (External)
Battery Operating Time	7.5 hours of Continuous Running (@25°C, Hotspot off)
Power Supply	5 VDC/2 A, USB Type-C Interface Only internal battery support direct charge
General	
Mounting	Standard 30 mm

Protection Level	IP67
Working Temperature	-30°C to 55°C (-22°F to 131°F)
Dimension	280.7 mm × 86.1 mm × 57.3 mm (without eyepiece)
Weight	450 g without External Battery
<b>Laser Rangefinder</b>	
Safety Class for Laser	NA
Wavelength	NA
Min. Measuring Range	NA
Max. Measuring Range	NA
Measurement Accuracy	NA

## ▪ Available Model


A40E

## ▪ Dimension

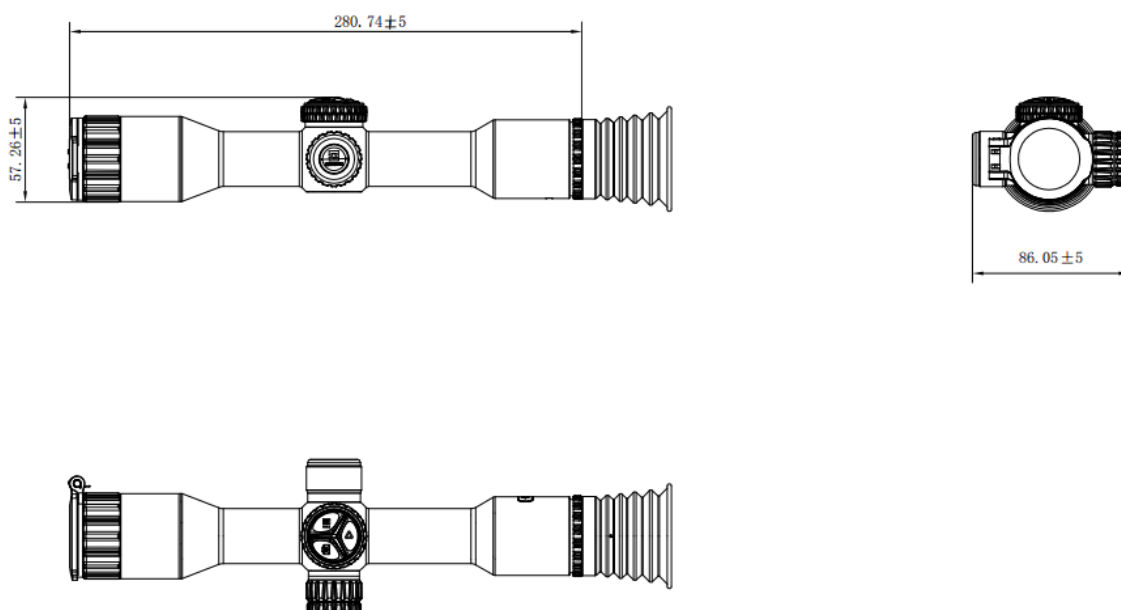

Unit: mm

## ▪ Accessories

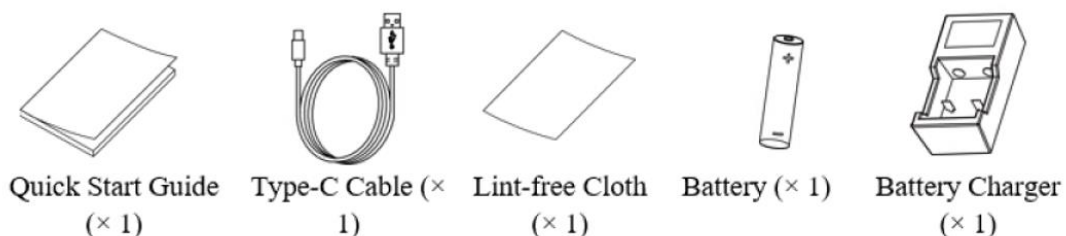



 Hikmicro Hunting.Global    HIKMICRO Outdoor    [www.hikmicrotech.com](http://www.hikmicrotech.com)    [hikmicro\\_hunting\\_global](https://www.instagram.com/hikmicro_hunting_global)    HIKMICRO    [info@hikmicrotech.com](mailto:info@hikmicrotech.com)

Room 313, Unit B, Building 2, 399 Danfeng Road, Xixing Subdistrict, Binjiang District, Hangzhou, Zhejiang  
© Hangzhou Microimage Software Co., Ltd. All rights reserved. | Data subject to change without notice!